


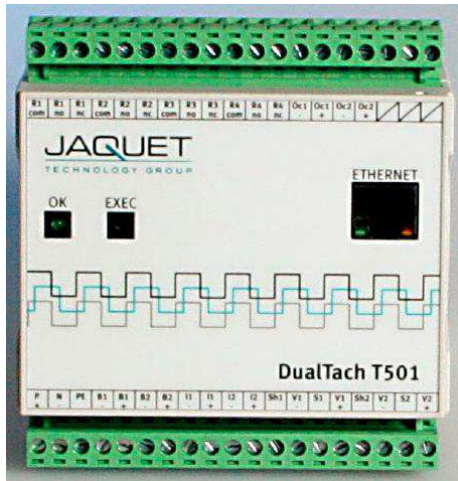

T500 TACHOMETER

DualTach - a measurement & monitoring instrument with 2 frequency inputs

Features

- High accuracy speed measurement: 0.002% for limits and 0.1% referenced to 20 mA
- 2 frequency + 2 binary inputs
- 2 current, 4 relay and 2 Open Collector outputs
- Sensor monitoring for all sensor technologies
- Ethernet interface - configuration via Java™ based software
- Extensive parameter and limit setting possibilities
- Programmable logical, diagnostic and measurement functions
- Plug in terminals

The T500 Advantage

- Fast 8 ms relay reaction time on over speed
- 4 parameter sets each with 6 System Limits for almost limitless applications
- Logical limit combinations save relays & wiring
- Acceleration measurement
- Compatible with all popular sensor types

Typical Applications

- Micro turbine speed measurement and over speed protection
- Diesel engine start control and protection
- Dual turbocharger speed measurement
- Universal tachometer

2 Channel Tachometer with 4 Relays, 2 Open Collector and two 0/4-20mA Outputs:

Type and part numbers	AC version:	T501.50	Part number: 384Z-05600
	DC version:	T501.10	Part number: 384Z-05601

Technical Data

Measurement range	0.025 Hz... 50.00kHz		
Measuring time	Configurable min. measurement time (tM): 2/5/10/20/50/100/200/500 ms, 1/2/5s.		
Reaction time	Current output: Relays:	Typical tM + 4.1 ms Typical tM + 6 ms	Maximum Input period + tM + 4.1 ms Maximum Input period + tM + 6 ms
Accuracy	Limits / inputs	Frequency: 0.002%	
	Current output	0.1% referenced to 20mA or the end value Max 0.2 % from measuring value + 2 LSB (-40°...+70°C)	
Sensor inputs (2 inputs)	To measure frequency signals (speed sensors)		
Frequency range	0.025 Hz to 50 kHz		
Trigger levels	Selectable by software:	Fixed at 3 V or adaptive from either 20 mVrms or 180 mVrms	
Sensor supply	+14 V ±0.5 V, max 35 mA, short circuit proof		
Monitoring	3 wire sensors:	Programmable current consumption limits of 0.5...35mA.	
	Electromagnetic sensors:	Open circuit detection	
Binary inputs (2 inputs)	Isolated inputs for binary signals		
Levels	Low: < +5 V	High: > +15 V	(software selection of active Low or High)
Functions	External selection of controls (parameter sets) Combination in System Limit Reset for relay, creep and memory Configuration and monitoring Ethernet interface		
Data I/O			
Supply	AC version:	90...264 VAC max 14 W / 120...370VDC	
	DC version:	18...36 VDC max 6.8 W	
Relays (4 relays)	To treat the status of System Limits and sensor		
Limits	4 parameter sets each with 6 System Limits (AND / OR combined values)		
Hysteresis	Freely programmable upper and lower set-points for each limit		
Contacts	Change-over: 230 VAC / max. 0.45 A 125 VAC / max. 1 A 30 VDC / max. 2 A		
Open collector (2 outputs)	Isolated outputs of sensor frequencies: programmable x1, x2 or x4 (subject to 2 channel phase shift) Can also react on System Limits, see above		
Function	Latching / inversion (fail safe)		
Contacts	Umax = 36 Vdc Imax = 30 mA		
Analog outputs (2 outputs)	Isolated current output to treat information of sensor 1, 2, analog in or of the math result		
Type	0...20 mA / 4...20 mA		
Maximum load	500 Ohm corresponding to a maximum of 10 V		
Resolution	14 bit corresponding to 1:16384 (actual resolution: 1.36 µA)		
Linearity error	Max. 0.015 %		
Temperature drift	Typ. ± 50 ppm/K, max ± 120 ppm/K		

T500 TACHOMETER

Operating temperature	AC Version: -25°...+50°C DC Version: -40°...+70°C
Storage temperature	-40°...+85°C
Climatic immunity	In accordance with DIN 40 040
Relative humidity	75% averaged over 1 year; up to 90% for 30 days max.
Isolation	Min. 1000 V
EMC	Electrostatic discharge: IEC 61000-4-2 Electromagnetic fields: IEC 61000-4-3 Fast transients: IEC 61000-4-4 Slow transients: IEC 61000-4-5 RF common mode: IEC 61000-4-6 Magnetic fields: IEC 61000-4-8


Limits for limitless applications

T500's allow you the freedom to choose the functions or system configuration that best match your application.

As well as being replacements for previous generation tachometers they can process multiple sensors data including frequency and binary inputs.

Want to know when a trip occurred? Could really do with more gear teeth than space allows? Need to swap between different parameter sets? - No problem - the T500 DualTach provides the solution.

Uniquely, the T500's also enable you to logically combine decision parameters from more than one sensor or command to create control signals.

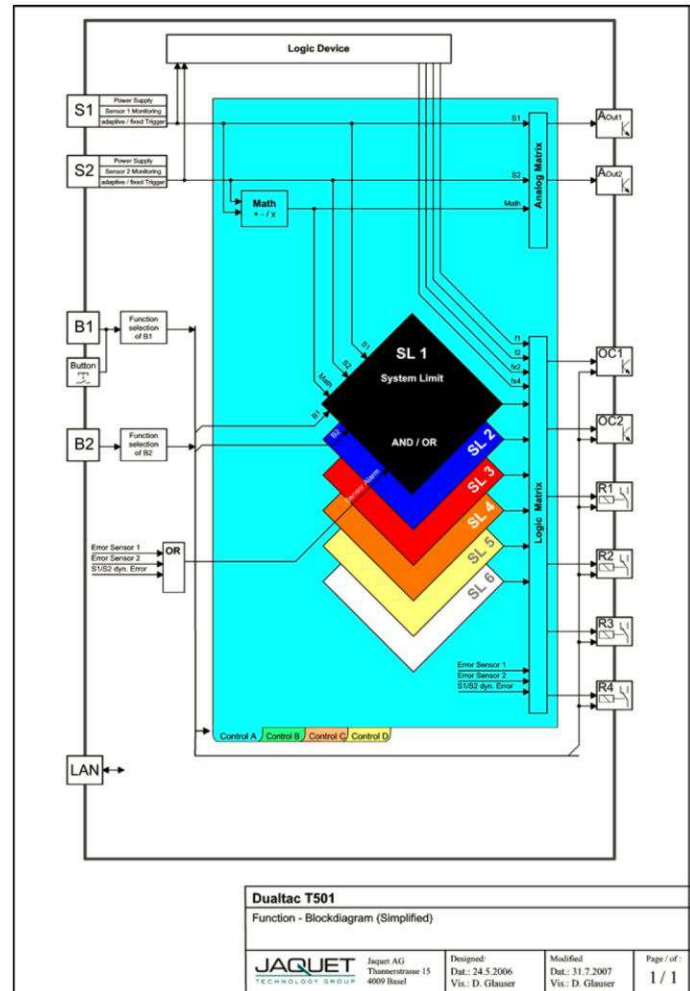

神州融安科技（北京）有限公司

电话：010-62127688、82057633

地址：北京市海淀区花园路2号牡丹科技楼B座三层B308室

网址：www.ronganchina.cn

NORTH AMERICA

Tel +1 800 522 6752
wema us orders@te.com

EUROPE

Tel +31 73 624 6999
tess-ic-tlse@te.com

ASIA

Tel +86 0400 820 6015
customercare.shzn@te.com

te.com

TE Connectivity, TE, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2020 TE Connectivity Corporation. All Rights Reserved.

Version # 08/2020

