





## MODEL 3700 ACCELEROMETER

### SPECIFICATIONS

- ♦ Shock & Impact Testing
- ♦ Piezoresistive MEMS
- ♦ mV Output, DC Response
- ♦ Low Noise, Shielded Cable

The **Model 3700** is a MEMS piezoresistive shock accelerometer in a rugged stainless steel package. The accelerometer is available in ranges from is offered in ranges from  $\pm 50$  to  $\pm 6000g$  and is ideal for long duration shock transient measurements. The accelerometer incorporates mechanical over-range stops and is packaged in an industry standard footprint.

### dimensions

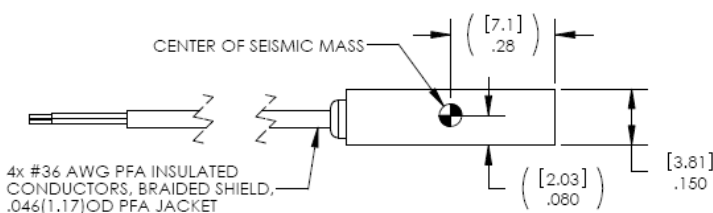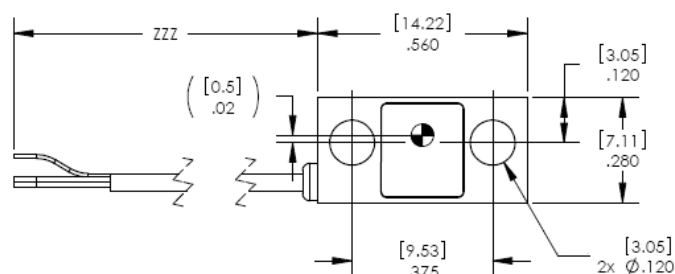


### FEATURES

- ♦  $\pm 50g$  to  $\pm 6000g$  Dynamic Range
- ♦ 10,000g Shock Protection
- ♦ Environmentally Sealed
- ♦ Gas Damping
- ♦ mV Output
- ♦ Stainless Steel Housing
- ♦ Bolt Mounted

### APPLICATIONS

- ♦ Impact Testing
- ♦ Structural Testing
- ♦ Transient Shock Testing
- ♦ Auto Safety Applications

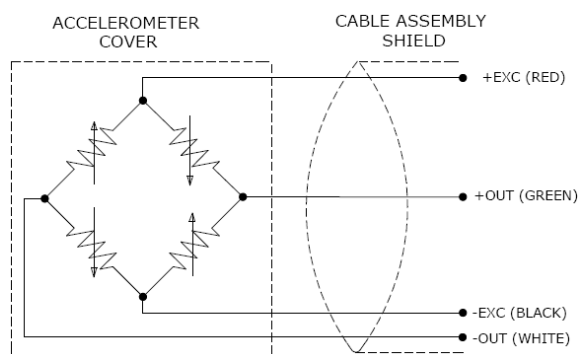

## PERFORMANCE SPECIFICATIONS

All values are typical at +24°C, 80Hz and 10Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice.

Parameters							Notes
<b>DYNAMIC</b>							
Range (g)	±50	±100	±200	±500	±2000	±6000	
Sensitivity (mV/g) <sup>1</sup>	2.0	0.9	0.7	0.4	0.15	0.08	@10Vdc Excitation
Frequency Response (Hz)	0-1000	0-1400	0-1500	0-2000	0-5000	0-5000	±1/2dB
	0-1400	0-1800	0-1900	0-2800	0-7000	0-7000	±1dB
Natural Frequency (Hz)	4000	6000	8000	15000	24000	26000	
Non-Linearity (%FSO)	±1.0	±1.0	±1.0	±1.0	±1.0	±2.0	
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<3	<1% Option
Damping Ratio	0.6	0.5	0.5	0.3	0.15	0.1	
Shock Limit (g)	10000	10000	10000	10000	10000	10000	
<b>ELECTRICAL</b>							
Zero Acceleration Output (mV)	<±25						Differential
Excitation Voltage (Vdc)	2 to 10						
Input Resistance (Ω)	2400-6000						
Output Resistance (Ω)	2400-6000						
Insulation Resistance (MΩ)	>100						@100Vdc
Residual Noise (μV RMS)	<10						
Ground Isolation	Isolated from mounting surface						
<b>ENVIRONMENTAL</b>							
Thermal Zero Shift (%FSO/°C)	±0.04						Typical
Thermal Sensitivity Shift (%/°C)	-0.15						Typical
Operating Temperature (°C)	-55 to +125						
Storage Temperature (°C)	-55 to +125						
Humidity	Epoxy Sealed, IP65						
<b>PHYSICAL</b>							
Case Material	Stainless Steel						
Cable	4x #36 AWG Leads, PFA Insulated, Braided Shield, PFA Jacket						
Weight (grams)	2.1						
Mounting	2x #4-40 or M3 Mounting Screws						
Mounting Torque	8 lb-in (0.9 N-m)						

<sup>1</sup> Output is ratiometric to excitation voltage

**Calibration supplied:** CS-FREQ-0100 NIST Traceable Amplitude Calibration from 20Hz to ±5% Frequency Limit

**Supplied accessories:** 2x #4-40 Mounting Screws (1/4 inch length)

**Optional accessories:** AC-D03249 Triaxial Mounting Block  
121 3-Channel Precision Low Noise DC Amplifier  
140A Auto-Zero Inline Amplifier

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

ORDERING INFO

3700	GGG	ZZZ
Series Type		
Range		
050=50g		
100=100g		
200=200g		
500=500g		
2K=2000g		
6K=6000g		
Cable length		
060=60 inches		
120=120 inches		
180=180 inches		
240=240 inches		
300=300 inches		
360=360 inches		
480=480 inches		
600=600 inches		
197=197 inches, 5 meters		
394=394 inches, 10 meters		

Example; 3700-100-060  
Model 3700,100g range, 60inch cable length

神州融安科技（北京）有限公司  
电话：010-62127688、82057633  
地址：北京市海淀区花园路2号牡丹科技楼B座三层B308室  
网址：www.ronganchina.cn

**NORTH AMERICA**  
Measurement Specialties, Inc.,  
a TE Connectivity Company  
Tel: 800-522-6752  
Email: [customercare.hmpt@te.com](mailto:customercare.hmpt@te.com)

**EUROPE**  
MEAS France SAS  
a TE Connectivity Company  
Tel: 800-440-5100  
Email: [customercare.lcsb@te.com](mailto:customercare.lcsb@te.com)

**ASIA**  
Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
Tel: 0400-820-6015  
Email: [customercare.shzn@te.com](mailto:customercare.shzn@te.com)

**TE.com/sensorsolutions**

Measurement Specialties, Inc., a TE Connectivity company.  
Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.  
The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.  
© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.