



DSH 16

Dual Channel Eddy Current Speed Sensor
for Railway Applications, compliant with EN 50155

Technical information


Version: 07.16

General	
Function	The speed sensors DSH 16xx.xx xHx are suitable, in conjunction with an aluminium pole wheel (or other conducting, non-magnetic metal) for generating two nominally 90° phase shifted square wave signals indicating the rotary speeds and the direction of rotation.
Technical data	
Supply voltage	Nominal 15VDC (8 VDC to 30 VDC), protected against reverse polarity and transient overvoltages
Signal output	2 phase shifted square wave signals, output 1 (S1) and output 2 (S2) and direction output. - Duty cycle 50% ± 25% - Phase shift 90° ± 40° (on request ± 25°; target specification needed) - Push-pull outputs : $I_{max} = \pm 30 \text{ mA}$ - Output voltage HI (for $I = I_{max}$): $U_{HI} > U_{supply} - 1.5 \text{ V}$ - Output voltage LO (for $I = I_{max}$): $U_{LO} < 1.5 \text{ V}$ - The outputs are short circuit proof and protected against reverse polarity.
Current consumption	Max. 30 mA (without load)
Frequency range	Up to 20 kHz
Electromagnetic compatibility (EMC)	compliant with EN 50155
Protection class	Sensor head: IP68
Shock & Vibration	compliant with EN 61373 Cat.3
Operating temperature	- Sensor head: -40° ... +120°C - Cable: -40°C to +150 °C for the standard cable type 824L-36622
Requirements for pole wheel	Aluminum toothed wheel (other non-magnetic material on request) Optimal performance with - Rectangular gear tooth Module 3 - Tooth width ≥ 15 mm - Valley deep ≥ 3 mm - Side offset < 1 mm - Eccentricity < 0.1 mm
Air gap between sensor housing and pole wheel (depends on the pole wheel shape)	Module 2 0.2 ... 1 mm Module ≥ 3 0.2 ... 1.5 mm
Insulation	Housing and electronics galvanically separated (500 V/50 Hz/ 1 min)


Signal patterns, electronic type

00: push-pull 2 channels, no galvanic separation between channels plus 2 channels with the digitally inverted signals

Pulse diagram

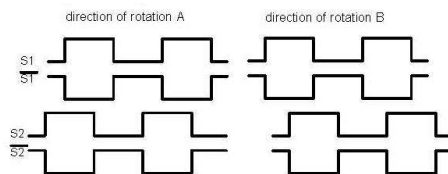


Schematic diagram



Dimensions

Sensor housing basic dimension

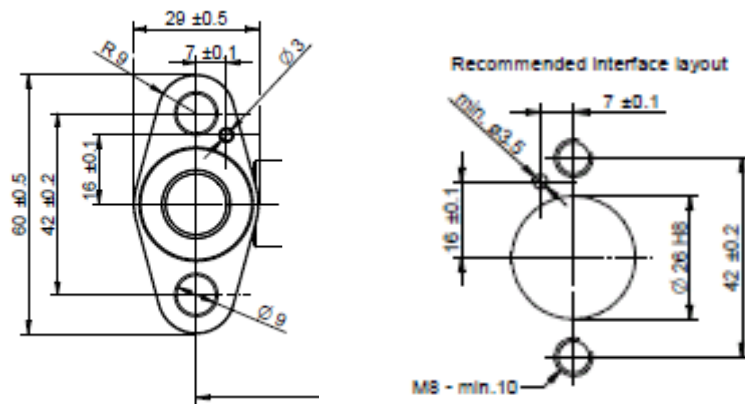

Recommended interface layout

Housing

Stainless steel 1.4305, front side sealed hermetically and resistant against splashing water, oil, conducting carbon- or ferrous dust and salt mist. Electronic components potted in chemical and age proof synthetic resin.

Dimensions according to the drawing.

F: straight


G: 90° angle

S: special housing design


Examples of sensor heads

Examples of sensor heads


ev

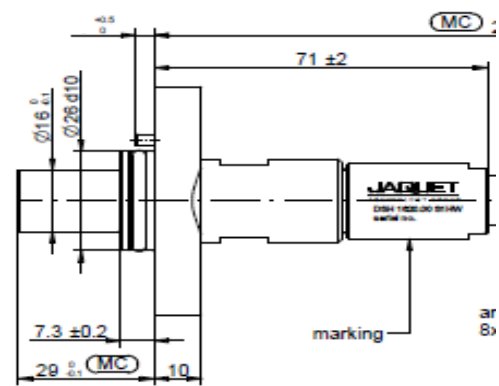

F: straight

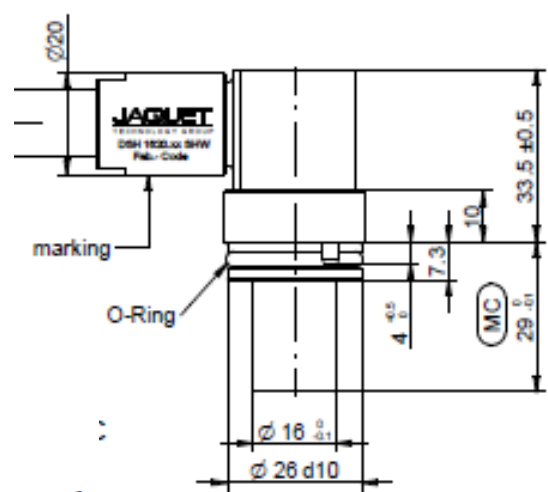

G: 90° (standard)

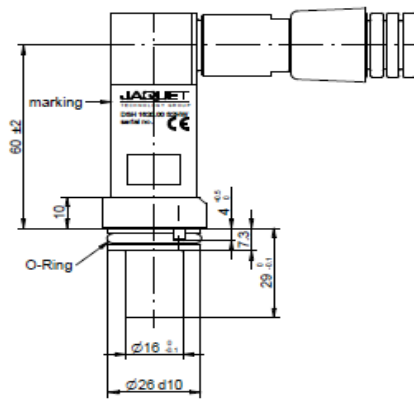

GS: 90° long

Cable & connection method


Jaquet cable type: 824L-36622

Properties


Armoured cable: 6-wire, 0.6 mm² (AWG 20), PEIC insulated, fire retardant, low smoke, PVC and halogen free, oil-proof, waterproof, outer-Ø max. 13.0 mm, min. bending radius = 30 mm (static) and 65 mm (dynamic), screened (metal net), black casing (silicone)

Operating temperature: -40°C to +150 °C
other cable types on request


Examples of connection method



S: open wire ends

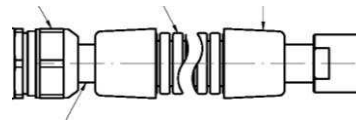


Q: straight with flexible cable sleeve

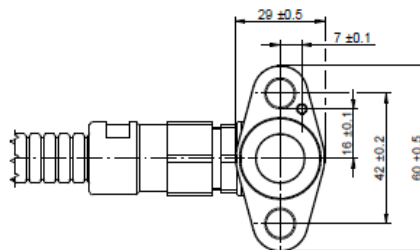


Q: fix cable sleeve and 90°


Connection method

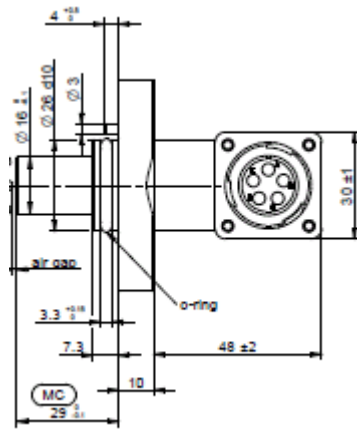

A: connector integrated in housing

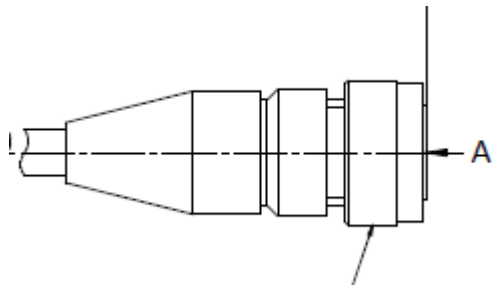

P: round connector



P: rectangular connector

P: other connectors on request

Ordering Information

DS	H	16	-	.	-	-	-	-	H	-	-	-	-		
DS	H	16	30	.	0	1	P	1	H	W	-	C	300	G	Example of identification
															Sensor housing F: standard straight G: 90° angle housing S: customized housing design
															Cable length in cm
															Cable Screen K: connected to the sensor housing via condenser (under request) C: connected to the sensor housing (standard)
															Output signal characteristics W: 2 channels with 90° phase shift, push-pull output, no galvanic separation
															Temperature Class Push-pull with galvanic insulation H: High temperature -40°C ... +120°C
															Customer specific version number
															Connection Method S: integral cable with open ends A: connector integrated in housing P: integral cable terminated with a connector Q: cable protected with cable sleeve and connector M: open end cable protected with cable sleeve
															Electronic Type 00: push-pull 2 channels, no galvanic separation between channels plus 2 channels with the digitally inverted signals
															Target module xy: module multiplied by 10 p. ex. 30: module 3.0
															Size of the sensor housing (diameter in mm) 16: sensor head diameter 16mm
															Sensor Technology H: Eddy current speed sensor

神州融安科技（北京）有限公司

电话：010-62127688、82057633

地址：北京市海淀区花园路2号牡丹科技楼B座三层B308室

网址：www.ronganchina.cn

NORTH AMERICA
Tel +1 800 522 6752

EUROPE
Tel +31 73 624 6999

ASIA
Tel +86 0400 820 6015

te.com/sensors

Jaquet, TE Connectivity, TE, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2021 TE Connectivity Corporation. All Rights Reserved.

Version # 04/2021