

M210 DISPLAY

SPECIFICATIONS

- Signal Conditioning
- Digital display meter
- Analogue output
- Casing mounted ABS in option

Features

- Analog Output: $\pm 10V$
- Red LED Display: 2,000 count
- High Bandwidth on analogue output (1 000 Hz)
- Low Noise Level

Applications

- Instrumentation Laboratory
- Test stand
- Process monitoring
- Rack Mounts

The **M210** electronic is an all-in-one signal conditioning and display meter that adapts to most strain gauge sensors. The **M210** device powers the sensor, amplifies the signals received from the sensor, and displays the value in real time.

The analog output is compatible with control systems and data acquisition cards. A power supply filter helps protect against incorrect voltage supply. The **M210** features high bandwidth and low noise level.

The large high visibility $\pm 2,000$ count LED display allows quick reading of the measurements.

Optionally, the **M210** offers many options including RTC switches and can be housed in an **ABS** case.

PERFORMANCE SPECIFICATIONS

All values are typical at temperature 23°C

General Characteristics

Dimensions (H x L x W)	48 x 96 x 155 mm [1.9 x 3.8 x 6.1 in]
Panel Cut-out	92 x 45 mm [3.6 x 1.8 in]
Operating Temperature	0° C to 50° C [32 to 122° F]
Storage Temperature	-40° C to 85° C [-40 to 185° F]
Relative Humidity	<95% at 40° C [104° F]
Rear panel connectors	-
Weight	600g [1.3lb]

Electrical Characteristics

Standard Operating Power Voltage (STD)	115/230 Vac \pm 10%, 50 to 60 Hz
Power Supply Filter with Overvoltage Protection	-
Optional Operating Power Voltage (DC)	10 to 30 Vdc
Consumption	6 VA
Sensor Excitation	10 Vdc, 50 mA maximum (\pm 5V) (12Vdc with option CD)
Sensor Sensitivity	10 to 1000 mV Full Scale

Amplification

Span	10 to 1000
Analog Output	10 Vdc \pm 0.05% Full Scale (FS)
Analogue output accuracy	\pm 0.01% FS
Bandwidth at -3dB	1kHz
Noise Level	<10 mV peak to peak


Display (1)

Type	Red LED Display \pm 2000 count display, 14mm
Display accuracy	0.2% F.S.
Conversion Rate	2.5 readings/second

Notes

1. The display works as an analogue output copy. If a calibration test is needed, it should be done thru the analogue output which is more accurate, and not with a display check only.

DIMENSIONS & WIRING SCHEMATIC

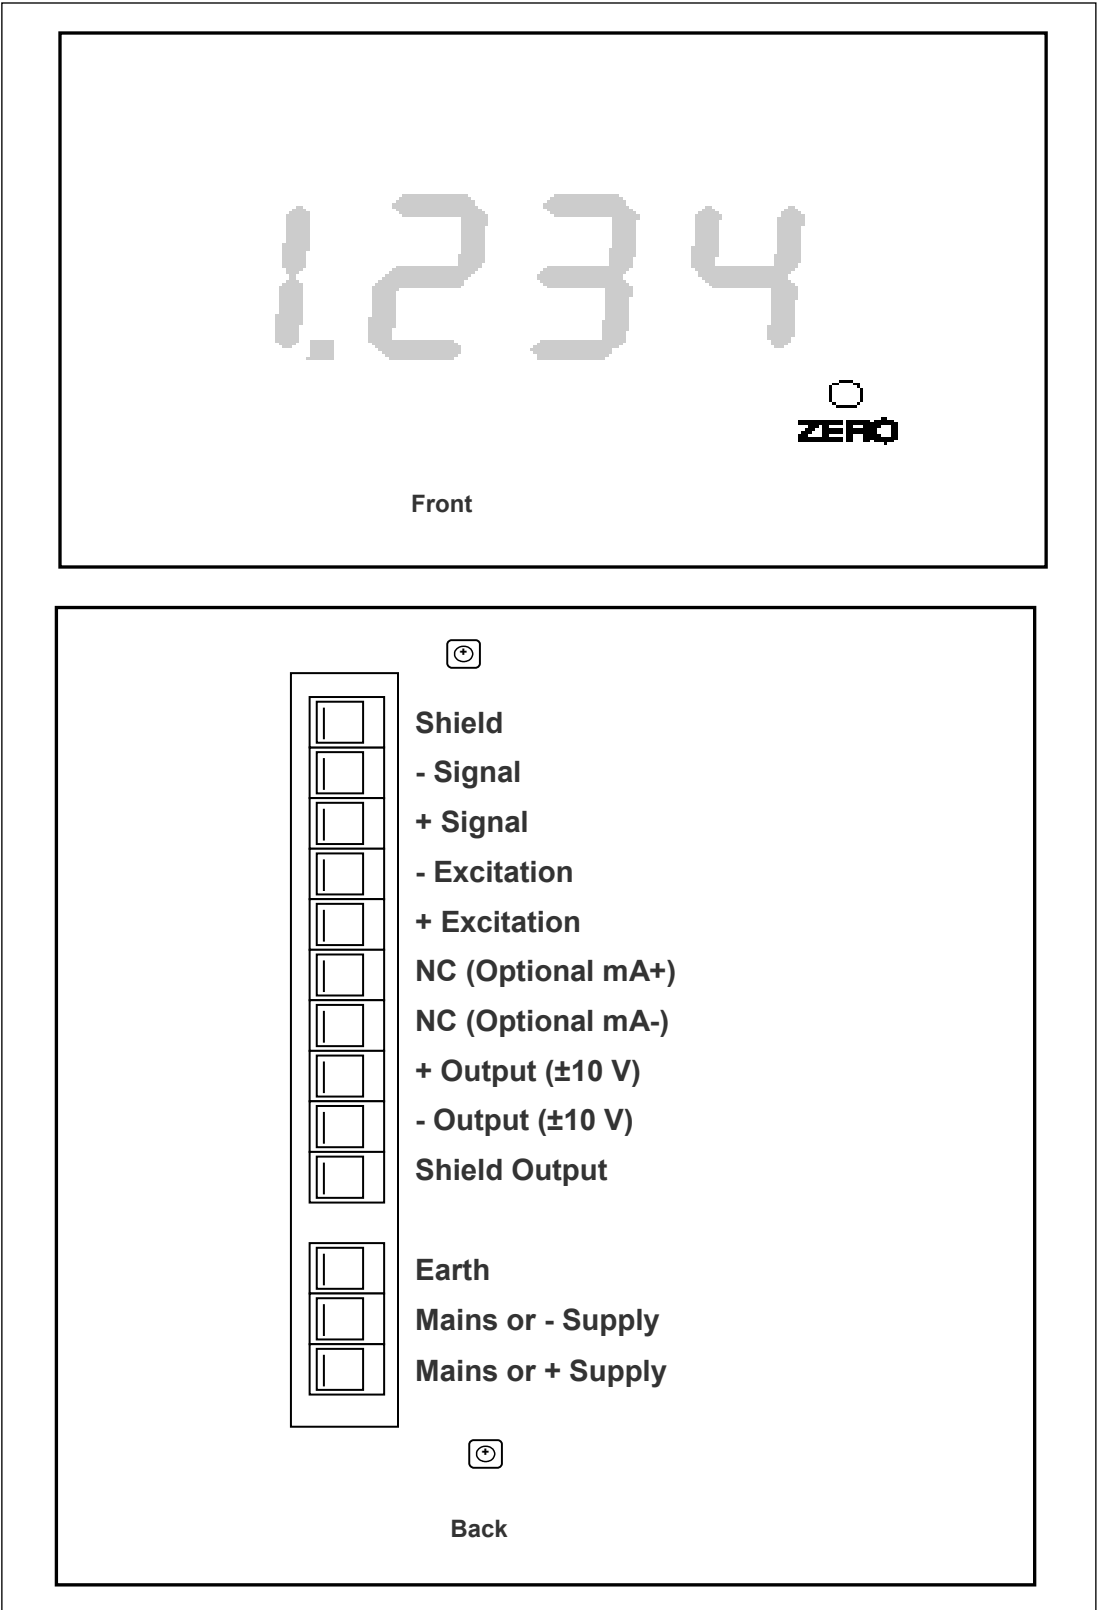


OPTIONS

DC	: Excitation 10 to 30 Vdc
4-20	: Analog Output Current 4 to 20mA
AL2	: Two adjustable threshold levels by internal relay
ABS	: House in ABS Case

Type of sensor

" "	: Wheatstone bridge sensor
CD	: Torquemeter type CD1140; CD9510

ORDERING INFORMATION

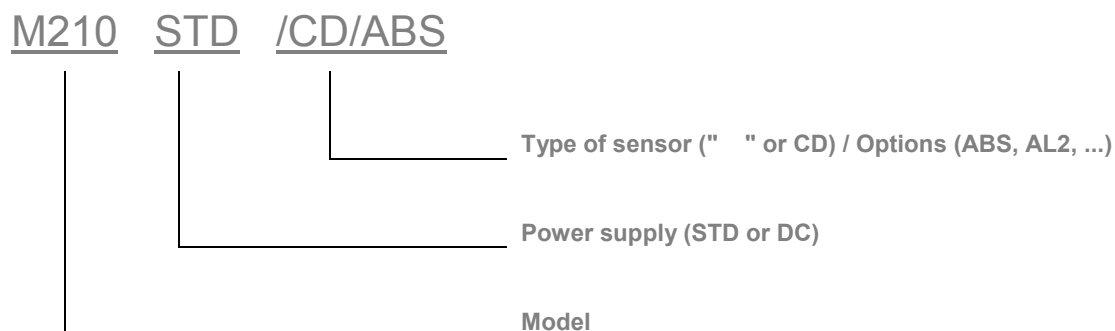

神州融安科技（北京）有限公司

电话：010-62127688、82057633

地址：北京市海淀区花园路2号牡丹科技楼B座三层B308室

网址：www.ronganchina.cn

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
Phone: +1 800 522 6752
Email: customercare.hmpt@te.com

EUROPE

Measurement Specialties (Europe), Ltd.
a TE Connectivity Company
Phone: +31 73 624 6999
Email: customercare.lcsb@te.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
Phone +86 400 820 6015
Email: customercare.shzn@te.com

te.com/sensorsolutions

Measurement Specialties, MEAS, American Sensor Technologies, AST TE Connectivity, TE, and the TE Connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, products and/or company names referred to herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2018 TE Connectivity Ltd. family of companies All Rights Reserved.